


FITTINGS

PVC ACME SERVICE TEE

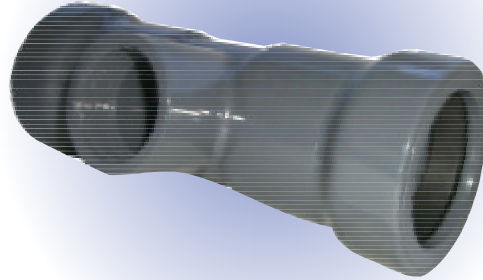

**PVC
PRESSURE**

**315 psi Long
Term
Pressure
Rating**

**Gasketed
Mainline
Bells**

**Straight
Thread,
O-Ring Seal
Branch
Outlet**

**Faster
Installation**

**No Teflon
Tape or
Paste**

**Eliminates
Split Threads**


Gasket x Gasket x Acme, O-Ring

Application

For use with swing joints having compatible inlet (threads and O-ring for Rainbird/Toro/Hunter Acme standard).

Installation

Fully thread swing joint into service tee. Back off to final position per swing joint manufacturer at least 1/4 rotation, but no more than 1 1/4 rotation.




Suggested Specifications

Service tees for swing joints shall be push-on gasketed and molded in one piece as manufactured by The Harrington Corporation of Lynchburg, Virginia. Branch outlets shall have a straight thread and an O-ring sealing surface compatible with the O-ring joint inlet of the mating swing joint. Fittings shall meet the requirements of a 315 psi long term pressure rating per ASTM D3139, per ASTM F1970, and per the methods of AWWA C907.

Product Information

SIZE	PART NUMBER	CTN. QTY.	CTN. WT.
2 x 1	153-204	16	17
2 x 1 1/4	153-205	16	17
2 x 1 1/2	153-206	16	17
2 1/2 x 1	153-254	16	29
2 1/2 x 1 1/4	153-255	16	29
2 1/2 x 1 1/2	153-256	16	24
3 x 1	153-304	16	42
3 x 1 1/4	153-305	16	42
3 x 1 1/2	153-306	16	42

Outlet fits all brands of single O-Ring ACME inlet swing joints. 2", 2 1/2", 3" and 4" ACME service tees available in HARCO Ductile Iron.

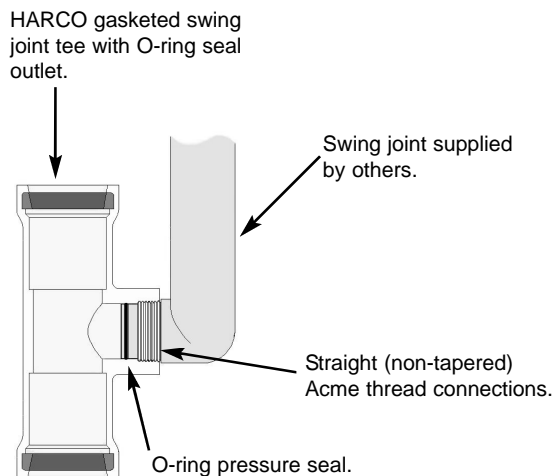

HARRINGTON CORPORATION • P.O. BOX 10335 • LYNCHBURG, VIRGINIA 24506

PHONE: 434-845-7094 • FAX: 434-845-8562 • E-MAIL: sales@harcofittings.com • WEB: www.harcofittings.com

PF107-071304